

JKM325PP-72(Plus)

310-325 Watt

POLY CRYSTALLINE MODULE

Positive power tolerance of 0/+3%

ISO9001:2008, ISO14001:2004, OHSAS18001 certified factory.

IEC61215, IEC61730 certified products.



Plus

(4BB)



KEY FEATURES



4 Busbar Solar Cell:

4 busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



Extreme high efficiency module:

Through the internal nano-level reflection technology to improve the power output, Polycrystalline 72-cell module achieves a power output up to 325Wp.



Anti-PID Guarantee:

Through the unique high reliability encapsulating technology to make sure the module possess anti-PID characteristics under high temperature and humidity for a long time, Have passed anti-PID test 60 C /85% RH condition for 1000h.



Low-light Performance:

Advanced glass and surface texturing allow for excellent performance in low-light environments.



Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability against extreme environmental conditions:

High salt mist and ammonia resistance certified by TUV NORD.




Temperature Coefficient:


Improved temperature coefficient decreases power loss during high temperatures.

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

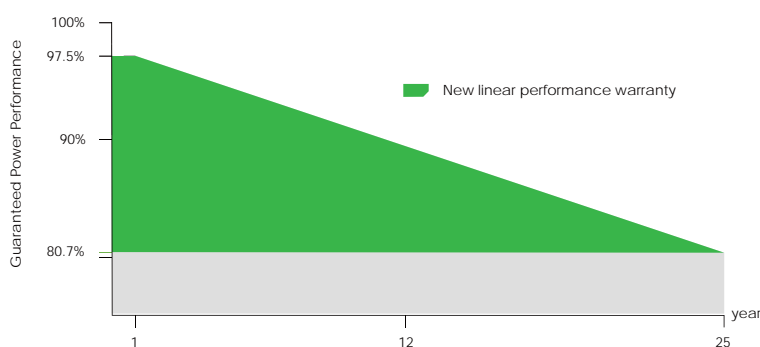

Engineering Drawings

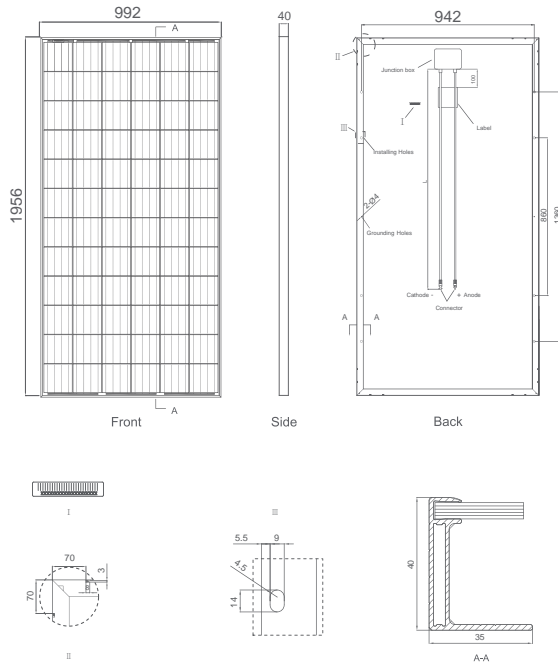


Packaging Configuration

(Two boxes = One pallet)


25pcs/ box, 50pcs/pallet, 600 pcs/40'HQ Container

Electrical Performance & Temperature Dependence

Current-Voltage & Power-Voltage Curves (305W)

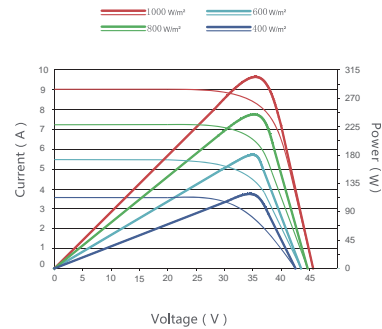

Temperature Dependence of Isc, Voc, Pmax



Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of cells	72 (6×12)
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)
Weight	26.5 kg (58.4 lbs.)
Front Glass	4.0mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1×4.0mm ² ; Length: 900mm or Customized Length

SPECIFICATIONS

Module Type	JKM310PP(Plus)		JKM315PP(Plus)		JKM320PP(Plus)		JKM325PP(Plus)	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	310Wp	231Wp	315Wp	235Wp	320Wp	238Wp	325Wp	242Wp
Maximum Power Voltage (Vmp)	37.0V	33.9V	37.2V	34.3V	37.4V	34.7V	37.6V	35.0V
Maximum Power Current (Imp)	8.38A	6.81A	8.48A	6.84A	8.56A	6.86A	8.66A	6.91A
Open-circuit Voltage (Voc)	45.9V	42.7V	46.2V	43.2V	46.4V	43.7V	46.7V	44.0V
Short-circuit Current (Isc)	8.96A	7.26A	9.01A	7.29A	9.05A	7.30A	9.10A	7.34A
Module Efficiency STC (%)	15.98%		16.23%		16.49%		16.75%	
Operating Temperature(°C)	-40°C~+85°C							
Maximum system voltage	1000VDC (IEC)							
Maximum series fuse rating	15A							
Power tolerance	0~+3%							
Temperature coefficients of Pmax	-0.40%/°C							
Temperature coefficients of Voc	-0.30%/°C							
Temperature coefficients of Isc	0.06%/°C							
Nominal operating cell temperature (NOCT)	45±2°C							

STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s

* Power measurement tolerance: ± 3%